

**CONFIDENTIAL**

**TEST REPORT ON  
DETERMINATION OF SOUND TRANSMISSION LOSS OF  
96 MM THICK METAL STUD PARTITION SYSTEM**

No. NVH/8278/2016-17/590 (V-4)-2

13<sup>th</sup> January 2017

**1.0 CUSTOMER NAME** : Ramco Industries Ltd.  
52, R.K. Mutt Road,  
I floor, Mylapore  
Chennai – 600 004,  
Tamilnadu

**2.0 LETTER REF.** : E-mail dated 23<sup>rd</sup> December 2016

**3.0 TEST COMPONENT** :

96 mm thick metal stud partition system with following details given by customer. Please refer Annexure 1 for isometric view and elevation drawing and details of 96 mm thick metal stud partition system.

**Main System** : 96 mm thick metal stud partition comprising of a composite framework which includes a 70mm G.I stud of 0.55 mm thick and having two unequal flanges of 34 and 36 mm each placed at 610 mm center to center in 72 mm G.I floor and ceiling channel with two equal flanges of 32 mm each fixed to floor and ceiling. This is done with the help of nylon sleeves and wood screws with a gap of 600 mm.

Single layer of 12 mm thick and 1200 -1250 kg/m<sup>3</sup> density Hicem flexo boards are then screw fixed to the studs and channels at 200 mm centres on both sides of the frame work, with 25 mm long G.I self-drilling & tapping screws having Phillips head. The board's joints are to be staggered to avoid through passage.

**Insulation** : 50 mm thick (Density - 48 kg/m<sup>3</sup>) Rock wool mat is to be placed in the cavity of the partition.

**Jointing and Finishing** : Finally edges of the facing boards are to be jointed and finished so as to have a seamless finish which includes filling and finishing with specially formulated jointing compound and 48 mm wide self-adhesive fibre tape.

**4.0 TEST REQUIREMENTS** :

Measurement of sound transmission loss of above mentioned 96 mm thick metal stud partition system as per ISO 10140-2 / ASTM E-90 and determination of sound transmission class (STC) as per ASTM E- 413 and weighted sound reduction index  $R_w$  (C; C<sub>tr</sub>) with spectrum adaptation terms as per ISO 717-1.

Page 1 of 6

**5.0 TEST PROCEDURE :**

The above mentioned 96 mm thick metal stud partition system of size 2.4 m x 2.4 m was mounted in the wall between two reverberation chambers and sealed all around at edges. Please refer figure 1 for test set up and mounting of system. The airborne sound transmission loss test was carried out five times on same system from both sides in a reverberation chambers and average value reported as per ISO 10140-2 / ASTM E-90 standard at temperature 25°C ± 1°C and humidity 46%.

**6.0 DATE OF EVALUATION :**

Test was carried out on 96 mm thick metal stud partition system on 11<sup>th</sup> January 2017 at NVH laboratory, ARAI-Pune in presence of Ramco Industries Ltd representative Mr. Nareshkumar A.

**7.0 INSTRUMENTATION :**

| Sr. No | Instrument Name                       | Type / Model No                               | Make                   | Calibrated on | Calibration due on |
|--------|---------------------------------------|---|------------------------|---------------|--------------------|
| 1      | Multi-channel Data Acquisition System | 3560 D  | Bruel & Kjaer, Denmark | 14-Jun-16     | 14-Jun-17          |
| 2      | ½" Random Incidence Microphone        | 378B20<br>(Sr. No. 109015 and Sr. No. 109016) | PCB, USA               | 16-Jun-16     | 16-Jun-17          |
| 3      | Power Amplifier                       | 2716  | Bruel & Kjaer, Denmark | -             | -                  |
| 4      | Omni directionnel sound source        | Omni power 4296                               | Bruel & Kjaer, Denmark | -             | -                  |
| 5      | Reverberation Chambers                | 80 m <sup>3</sup> and 110 m <sup>3</sup>      | -                      | -             | -                  |

**8.0 TEST RESULTS :**

Table 1 and figure 2 shows the values and plot for sound transmission loss of 96 mm thick metal stud partition system in the one-third octave frequency bands of 100 Hz to 8000 Hz, STC (sound transmission class) and R<sub>w</sub> (C<sub>100-5000</sub>; C<sub>tr100-5000</sub>) (weighted sound reduction index and spectrum adaptation terms).

**9.0 CONCLUSIONS** :

|  |                |
|--|----------------|
| <b>The sound transmission class (STC) is calculated as per ASTM E- 413 and weighted sound reduction index with spectrum adaptation terms <math>R_w</math> (<math>C_{100-5000}; C_{tr100-5000}</math>) is calculated as per ISO 717-1 for 96 mm thick metal stud partition system</b> |                |
| Sound transmission class (STC)   | 52 dB          |
| Weighted sound reduction index with spectrum adaptation terms $R_w$ ( $C_{100-5000}; C_{tr100-5000}$ )   | 52 (-1; -6) dB |

**Report Prepared By:**

**Reviewed By:**

**Approved By:**



**M. P. Joshi**  
Manager




**S. K. Jain**  
Dy. General Manager




**N. V. Karanth**  
Sr. Deputy Director & HoD

This test report pertains only to the systems actually tested at ARAI in the presented condition. The issuing of this test report does not indicate any measure of approval, certification, supervision, control of quality surveillance by ARAI of any product. No extract, abridgement or abstraction from this test report be published or used to advertise the product without the written consent of the Director, ARAI, who reserves the absolute right to agree or reject all or any of the details of any items of publicity for which consent may be sought.



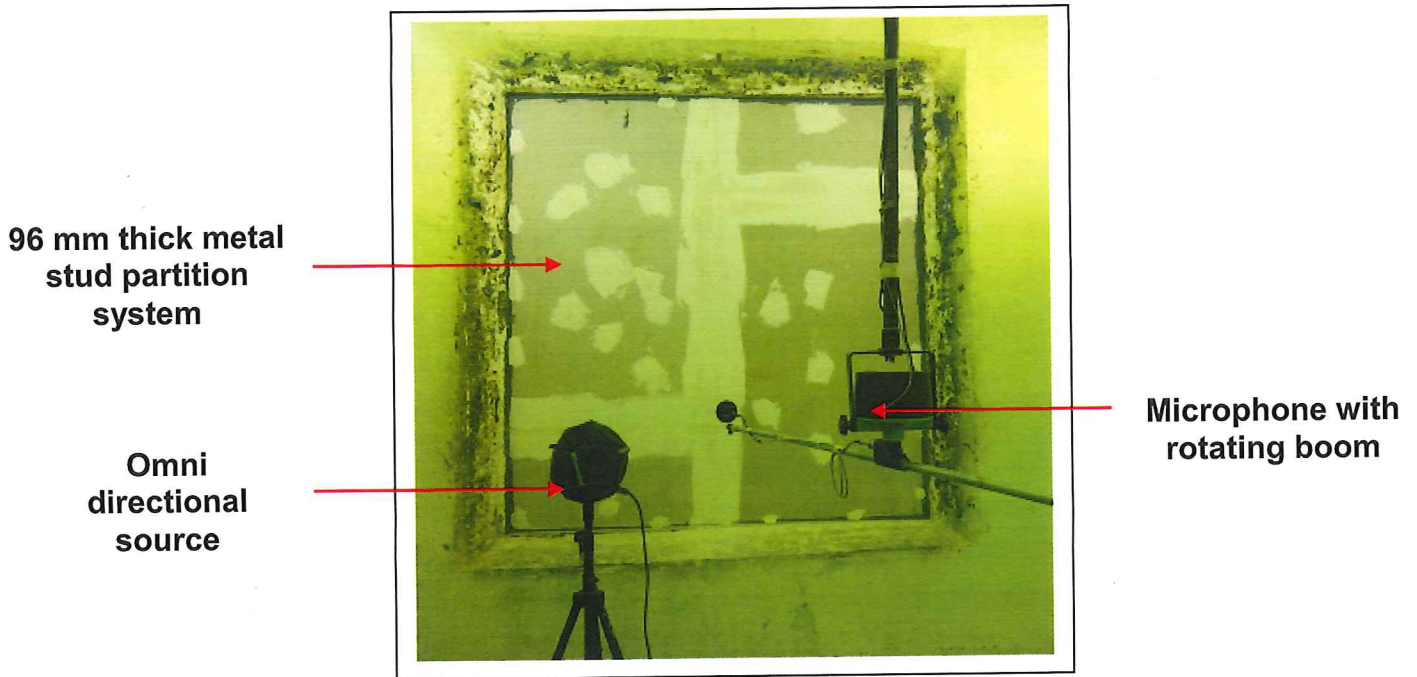

Source Room

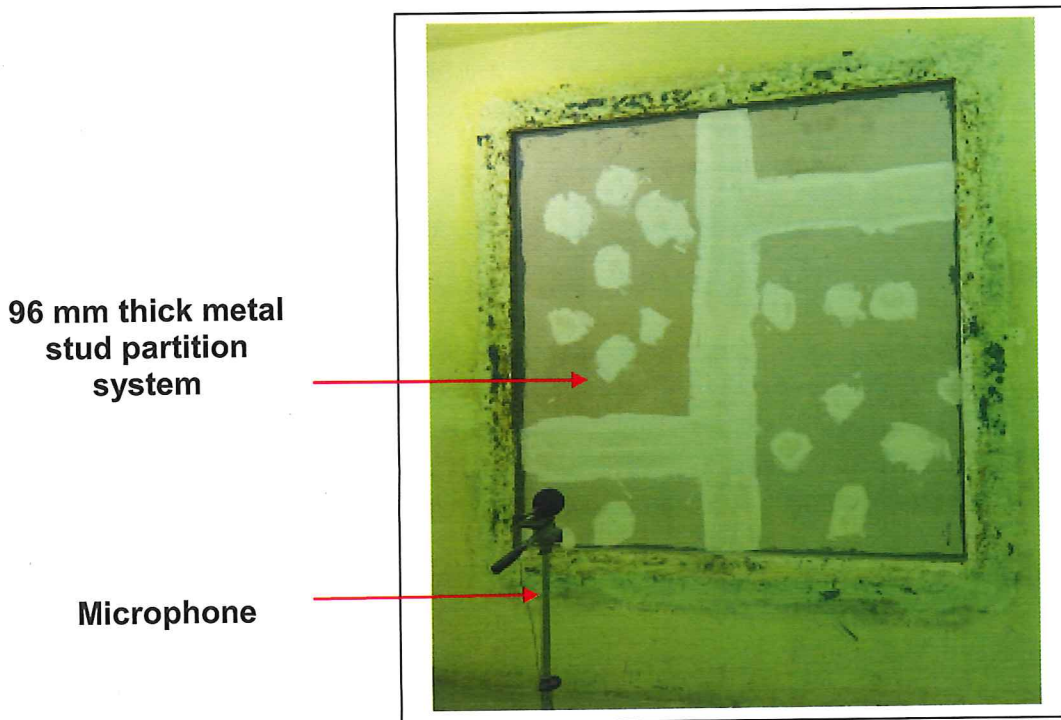


Receiver Room

Figure 1: The test set up for mounting of 96 mm thick metal stud partition system between two reverberation chambers

Table 1 and Figure 2: Values and plot for Sound Transmission Loss of 96 mm thick metal stud partition system at one third octave frequencies


| One Third Octave Frequency, Hz          | Sound Transmission Loss, dB | Standard Deviation |
|---|-----------------------------|--------------------|
| 100                                     | 31.4                        | 2.6                |
| 125                                     | 36.0                        | 2.7                |
| 160                                     | 36.3                        | 2.0                |
| 200                                     | 37.6                        | 2.2                |
| 250                                     | 38.6                        | 1.5                |
| 315                                     | 42.1                        | 2.1                |
| 400                                     | 48.1                        | 1.6                |
| 500                                     | 52.1                        | 1.5                |
| 630                                     | 55.7                        | 1.3                |
| 800                                     | 58.8                        | 1.3                |
| 1000                                    | 62.1                        | 1.2                |
| 1250                                    | 64.2                        | 1.4                |
| 1600                                    | 63.7                        | 1.6                |
| 2000                                    | 54.3                        | 1.0                |
| 2500                                    | 49.4                        | 0.7                |
| 3150                                    | 54.9                        | 0.7                |
| 4000                                    | 59.9                        | 0.9                |
| 5000                                    | 63.1                        | 1.3                |
| 6300                                    | 67.2                        | 0.9                |
| 8000                                    | 70.3                        | 0.4                |
| <b>STC</b>                              | <b>52</b>                   | -                  |
| <b>R<sub>w</sub>(C; C<sub>tr</sub>)</b> | <b>52 (-1; -6)</b>          | -                  |

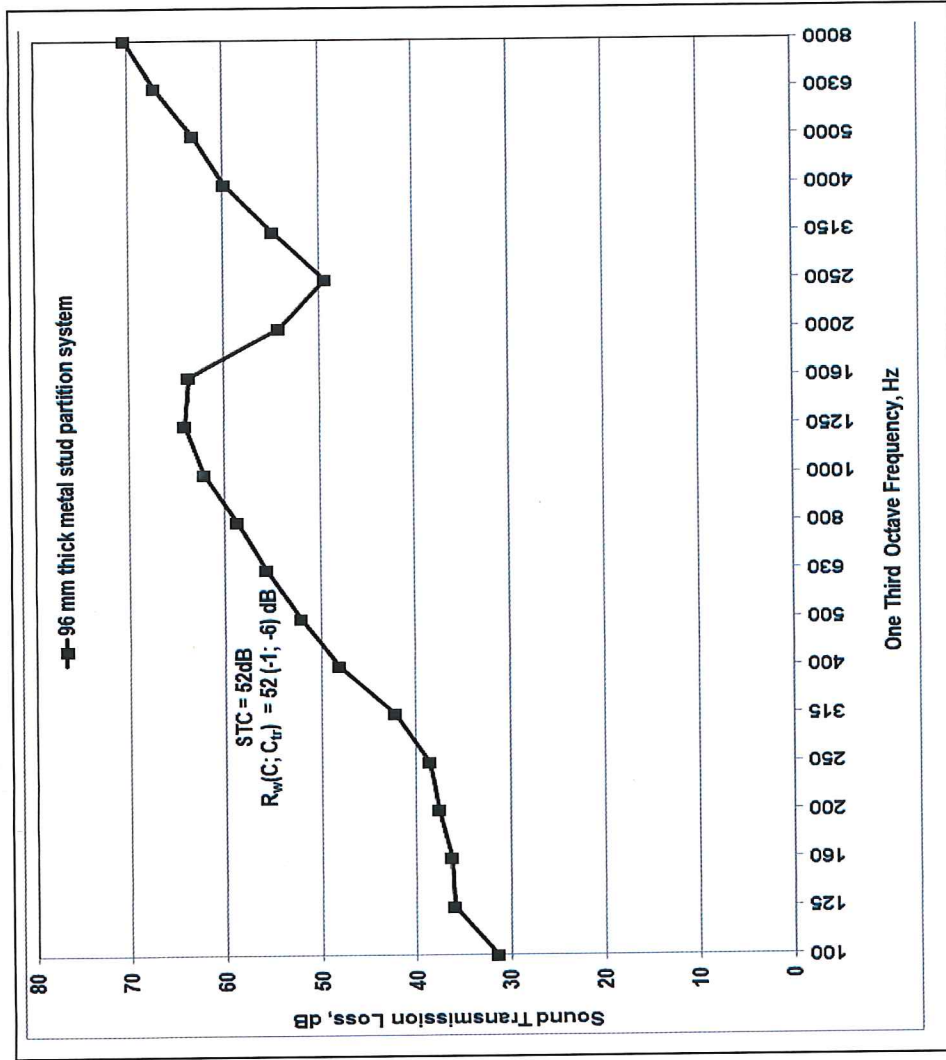


The Measurement Uncertainty in sound transmission loss evaluation is ± 3 dB from 125 Hz to 630 Hz and ± 1.5 dB above 630 Hz with 95.45 % confidence level and K= 2. The measurement uncertainty has been computed at one third octave frequency band from 125 Hz to 8000 Hz.

Annexure 1


**SOUND INSULATED PARTITION - HICEM FLEXO**

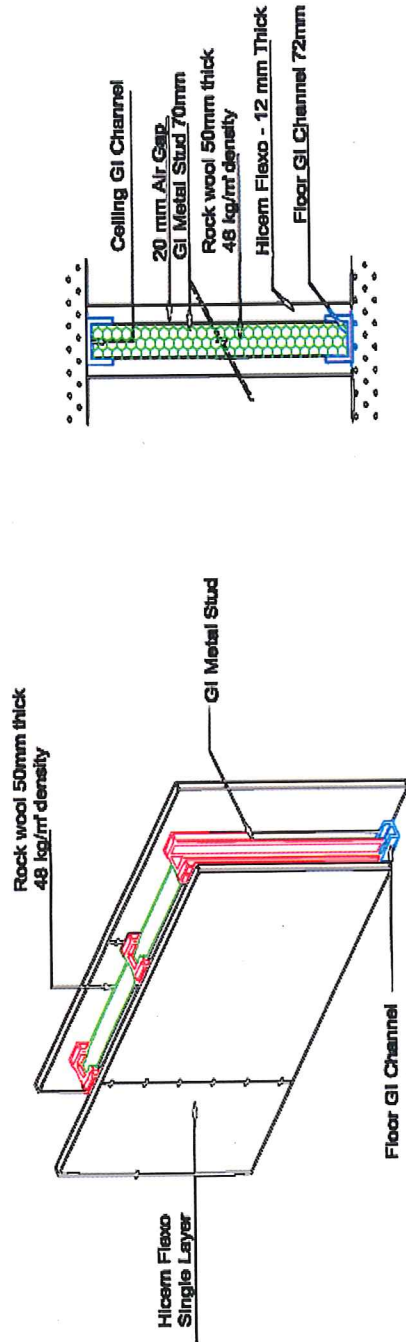

ISOMETRIC VIEW

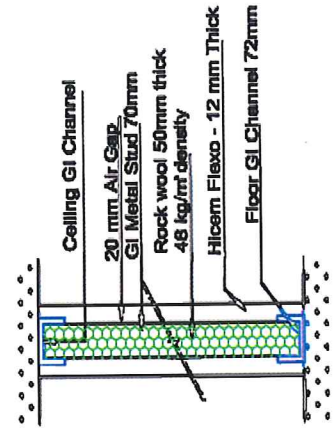

ELEVATION

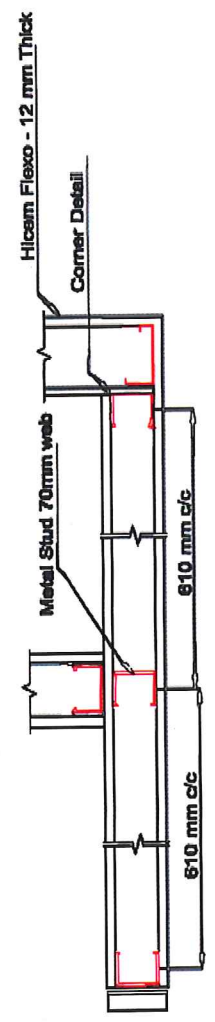

PLAN

Hicem Flexo - Size : 6' x 4' - 12 mm Thick + 20mm-Air gap  
Rock wool 50mm thick 48 kg/m<sup>3</sup> density

RAMCO INDUSTRIES LIMITED